

PROTOPIC™ - 540 QUATRO-SLIT

DUPLEX ON-DEMAND LAMINATOR AND FINISHING SYSTEM

The Protopic™ 540 Quatro-Slit will become the most versatile machine in your shop! The Protopic™ 540 Quatro-Slit packs a formidable list of abilities, including single-sided and duplex laminating, single-sided and duplex SHR™ (Silver Halide Replacement), producing layflat photo paper, spot Sleeking™, and metallic foil fusing. There is no other way to bring these value added processes in-house in a more economical and efficient package.



APPLICATIONS

- Single Side Lamination
- Duplex Lamination
- Single Sided and Duplex SHR™ (Silver Halide Replacement)
- SlitBook™ Technology Creates Layflat Prints for Photo Albums
- Full Sheet Sleeking™ on Digital Media - Gloss, Matte, and Holographic
- Spot Sleeking™ on Digital Media - Gloss, Matte, Holographic and Metallic

 49' per minute

 max. 21.25"W x 31.5"L

nobelus™
CONSIDER IT FINISHED

Note: The information given above is believed to be true and accurate and is not intended to violate any statutory condition or right of a third party. Nobelus™ makes no warranty, express or implied, as to the fitness of the products for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification.

PROTOPIC™ - 540 QUATRO-SLIT


DUPLEX ON-DEMAND LAMINATOR AND FINISHING SYSTEM

KEY FEATURES



SLITBOOK™ TECHNOLOGY

SlitBook™ Technology creates layflat photo albums by forming a flexible hinge in laminated media

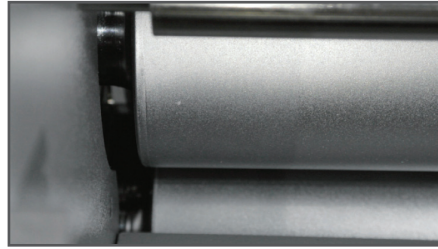

SHR™ EMBOSsing

Duplex SHR™ (Silver Halide Replacement) transforms digital prints with the rich texture of a silver halide print at a fraction of the cost. Eliminates toxic chemical processes.



CAPACITIVE TOUCH CONTROLLER

Intuitive Touch panel controller provides quick and easy access to all vital functions. The digital monitor screen displays settings and status messages.



SLEEKING TECHNOLOGY

Sleeking Technology opens a vast array of finishing options including variable data foil stamping, spot varnishing and holographic special effect sleeeking on digital output.

| Description | Specifications |
|--------------------------|---|
| Dimension | 79"L x 31.5"W x 52"H |
| Maximum Laminating Speed | SlitBook™ Lamination: 10'/min Single Sided Lamination: 49'/min Duplex Lamination: 23'/min Single Sided SHR™: 15'/min Duplex SHR™: 10'/min |
| Laminating Films | Nobelus Platinum™, PolyPro™, NyPro™, and SHR™ OPP |
| Substrate Weight | 120 ~ 300 g/m ³ |
| Power Requirements | AC 220V ~ 240V, 50/60Hz |

| Description | Specifications |
|------------------------|---|
| Warm Up Time | 15 Minutes |
| Heating System | Dual Infrared Heating Technology |
| Air Compressor | 1HP, 0.6mPa, 89L/min |
| Laminating Temperature | Maximum 150°C (302°F) |
| Pressure Control | Pneumatic Cylinder |
| Film Core | 3" |
| Cooling Device | DC Cooling Fan 5 Set Top & Bottom Roller |

nobelus™
CONSIDER IT FINISHED

Note: The information given above is believed to be true and accurate and is not intended to violate any statutory condition or right of a third party. Nobelus™ makes no warranty, express or implied, as to the fitness of the products for any specific use or purpose. The above data is purely for reader's consideration, investigation and verification.